



# E21



## SCSI - II D-SUB PCB RIGHT ANGLE DUAL PORT

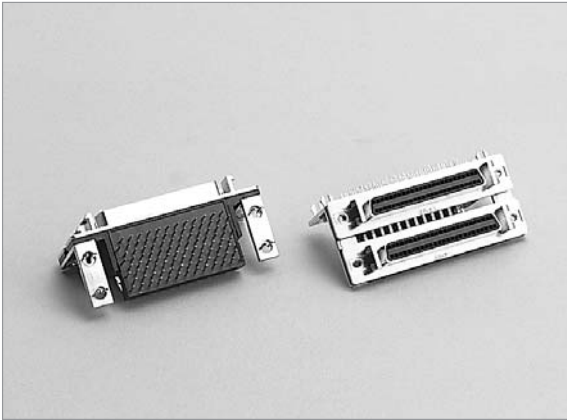

POSITION	A	B	C	D	E
50F/50F	34.30	46.50	52.65	40.10	30.48
68F/68F	45.73	57.93	64.80	51.53	41.93

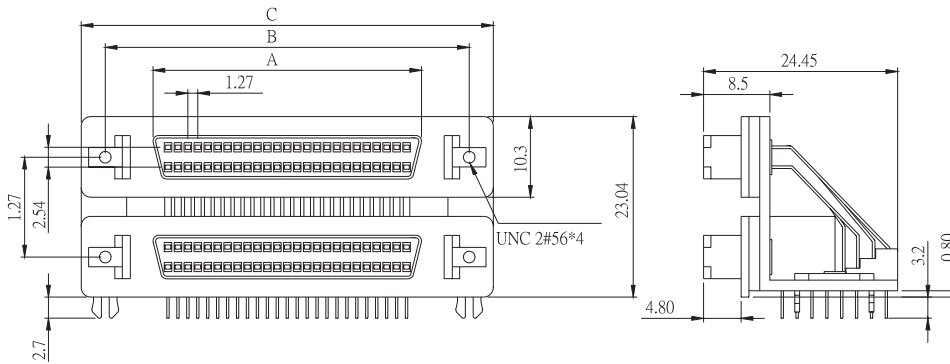

P.C.BOARD LAYOUT PATTERN

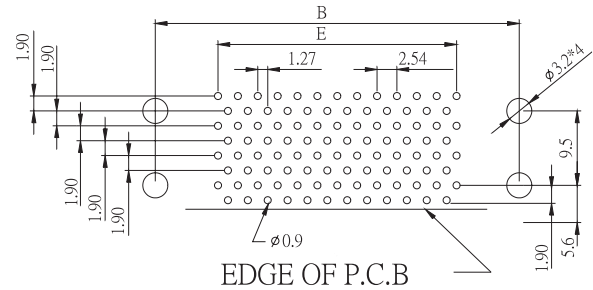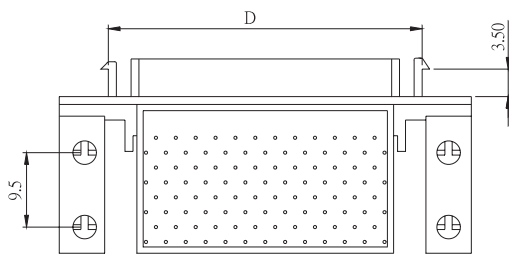

### HOW TO ORDER:

E21-  1 -  2 -  3 -  4 -  5 -  6 -  7 -  8

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT PLATING	4.SHELL OPTION
50=50/50 68=68/68	D: F/F	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: METAL SHELL
5.MOUNTING METHOD	6.PARTS OPTION	7.BOARDLOCK OPTION	8.INSULATOR COLOR
A: THREAD INSERT 2-56 UNC B: THREAD INSERT 4-40 UNC C: THREAD INSERT M3 D: THREAD INSERT M2.6	A: WITH FRONT LATCH B: WITHOUT FRONT LATCH	A: BOARDLOCK (Z-SHAPE) B: L-SHAPE	1. BLACK

E